




RMF – Modify Failback Setting

Vega Systems Inc.

03/14/2023

<https://www.vega25.com/rmf>

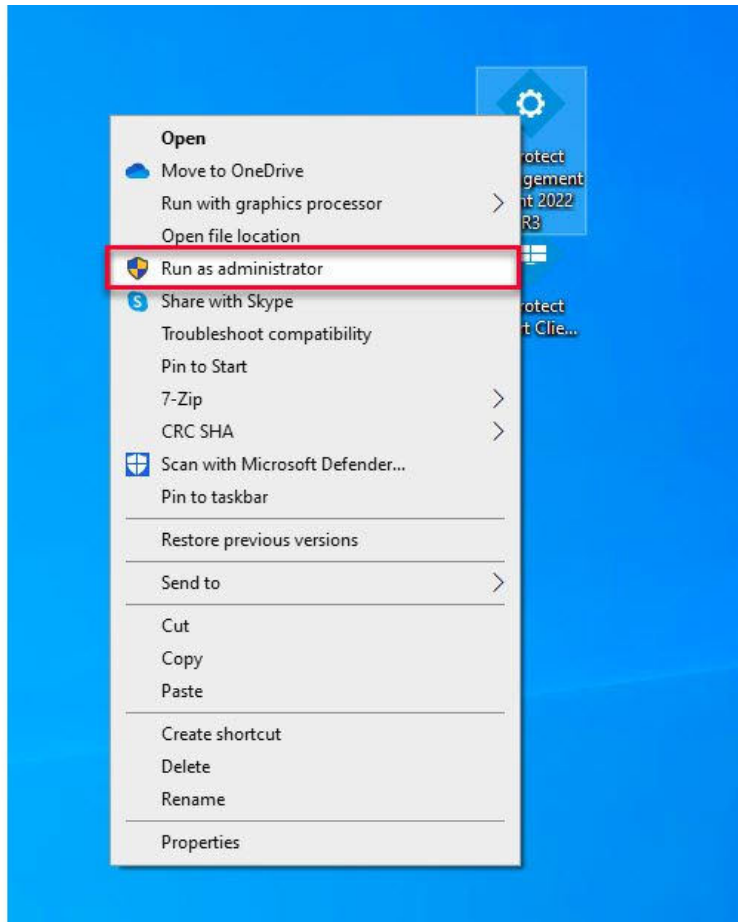

Step 1: Open the **Management Client**.

Note: Run as administrator

Milestone
XProtect® Management Client 2022 R3

Computer:
primaryrec1.vegadomn.com → Management Server

Authentication:
Windows authentication

Domain: vegadomn.com


User name:
vegadomn.com\milestone

Password:
•••••••


Remember password

Sign in Close


Step 2: Login into the **Parent Management Server** as a domain user with admin privileges. (Federated Deployments)
Login into Management Server as a user with admin privileges (Non-Federated Deployments)

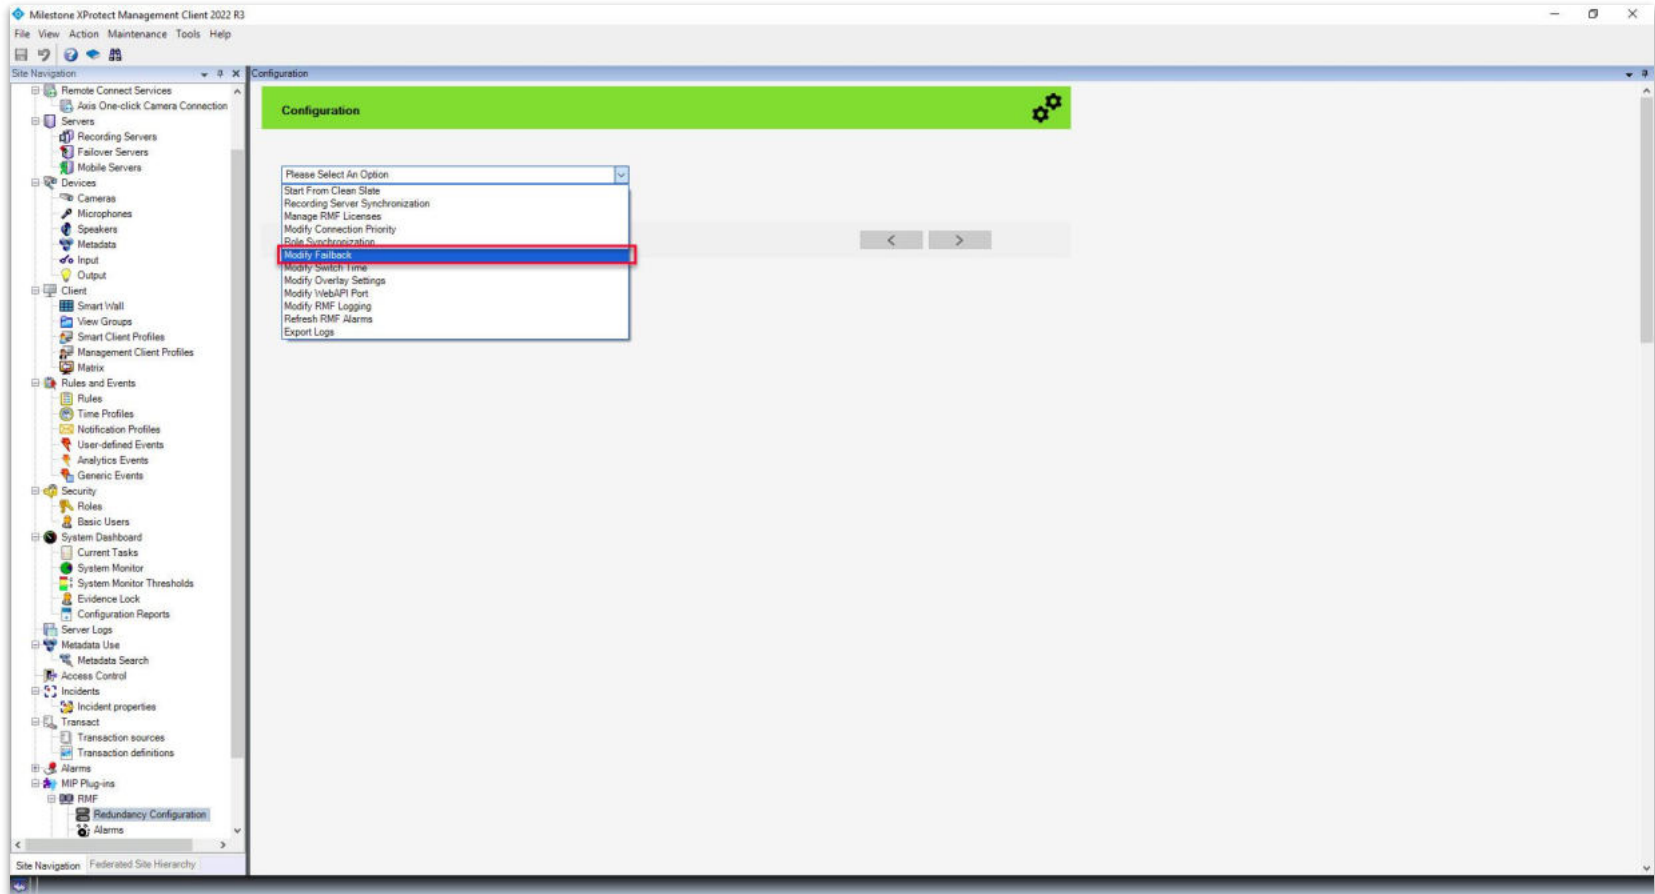

Step 4: Goto **Redundancy Configuration** under **Site Navigation** → **RMF**.
Select **Modify Failback** from the list.

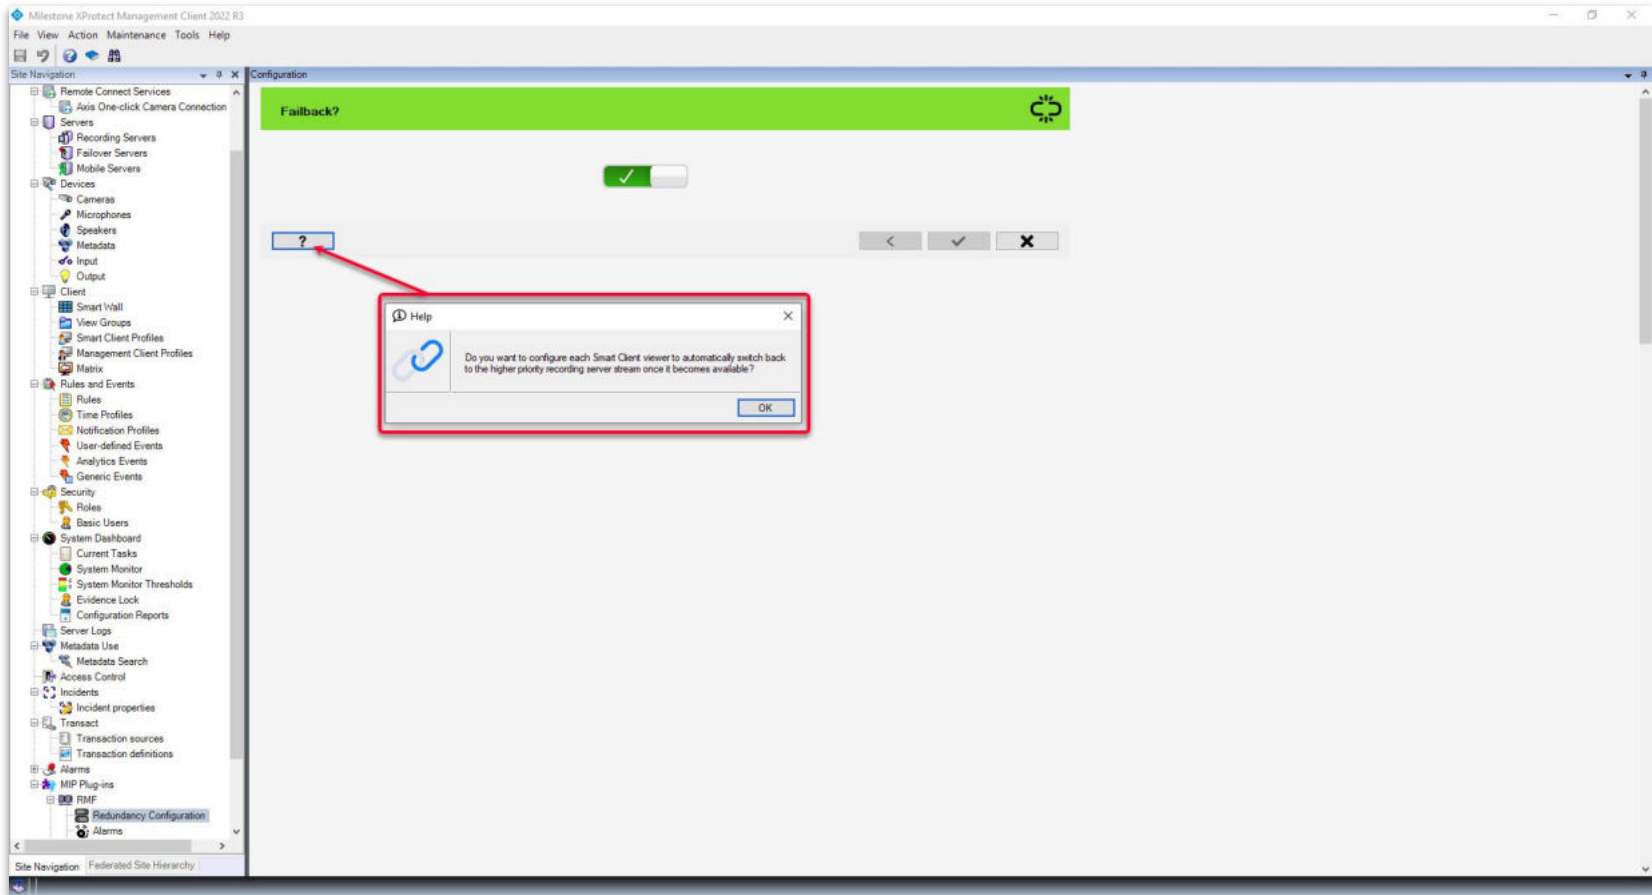

Step 5: Disabling failback will not switch to the higher-priority server even if the server is back online. Enabling failback will switch to the higher-priority server when the server is back online.

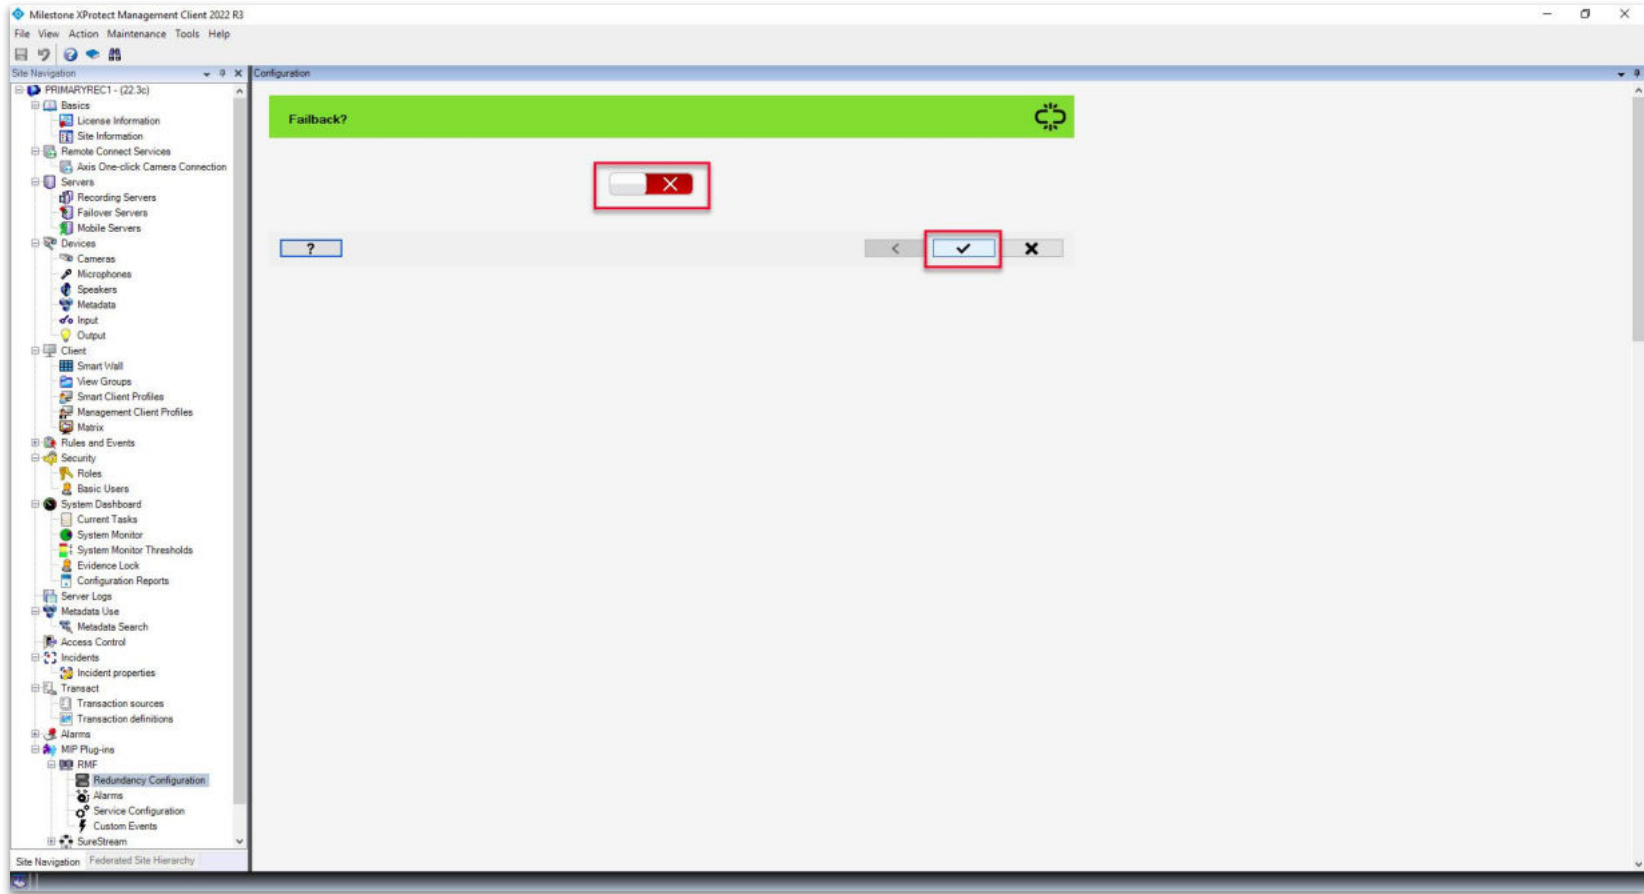


Step 6: Modify the failback as needed. Click **Finish**.



To apply the changes, please click on the 'Save' button located in the Milestone toolbar.

OK

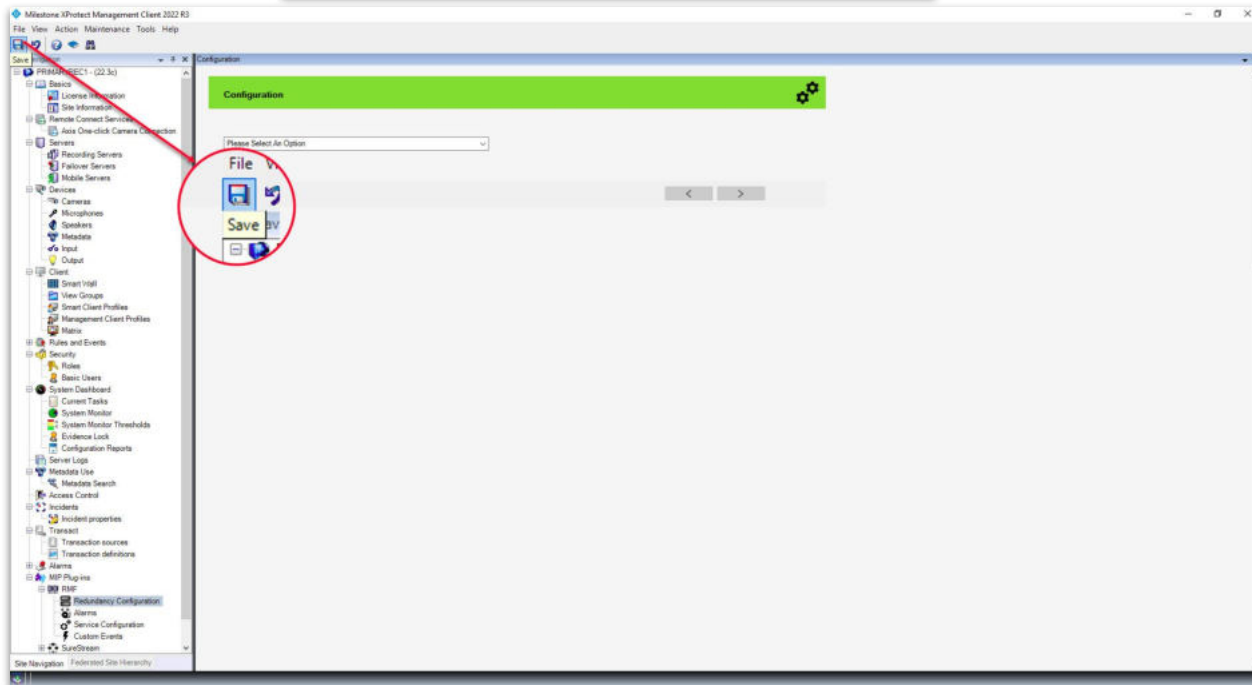

Step 7: Save the changes.